
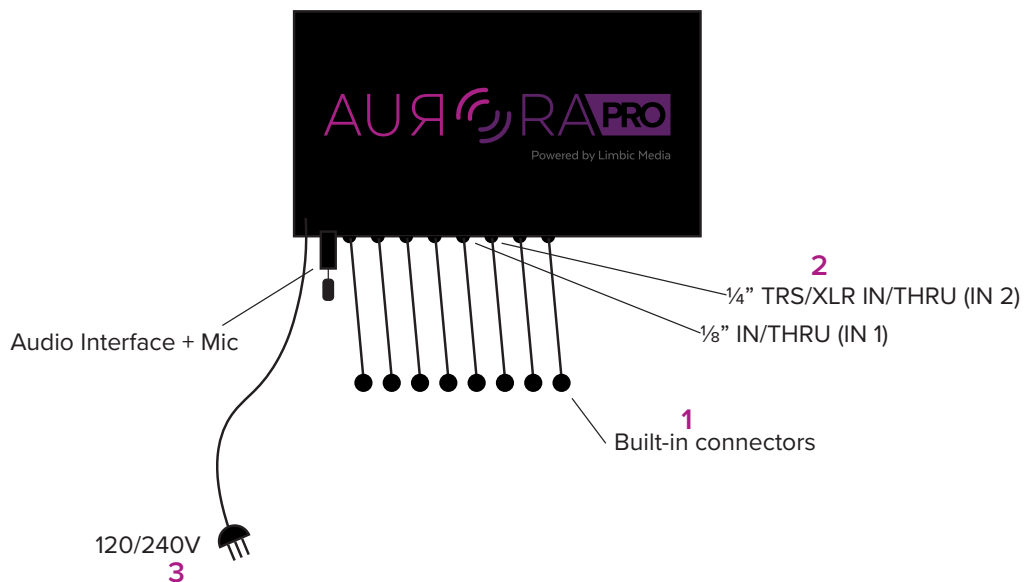


AURORA PRO QUICK START GUIDE

Using Built-In Connectors

Getting Started

1. Connect male end of lights to built-in connectors.
2. Connect audio source to one of Aurora Pro's audio inputs:
 - USB audio interface and mic
 - IN 1 (1/8" IN/THRU)
 - IN 2 (1/4" TRS/XLR Combo IN/THRU)
3. Plug in power cable.
4. Select audio source using audio select (SEL) button.

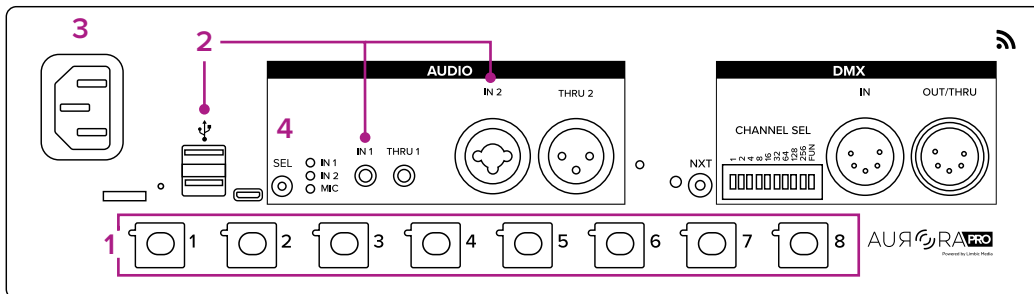

Default Aurora Pro Settings

- 25 lights per built-in connector
- Show Mode: Aurora Pro will cycle through 13 lighting cues for 45 seconds each

POPULAR TOPICS IN THE USER MANUAL

How to Connect and Configure the Aurora Mobile App	
Download or Update the Aurora Mobile App	page 25
How to change the number of lights	
Adjust Device Settings	page 26
How to control Aurora in real-time using the mobile app	
Adjust Live Control Mode	page 29
How to create your own lighting designs and schedule your own show	
Adjust Show Mode	page 29
How to control Aurora using DMX	
Set Up DMX IN	page 36
See also	
Troubleshooting	page 40
Patterns and Lighting Parameter Effects	page 41

Please refer to the Aurora Pro User Manual for additional information.

Aurora comes with 3 hours of FREE support.
Don't hesitate to contact us if you have any issues.
support@limbicmedia.ca (778) 430-5123