
AURORA 2.1 QUICK START GUIDE

Getting Started

1. Connect your mobile device to Aurora's wifi network (Aurora-XXXXXX) with default wifi password '**myaurora**'
2. Open a web browser and enter the URL: **Aurora.local**
   (bookmark or add to home screen for future reference)
3. Check audio settings at System › Audio
4. Set Aurora's time and location at System › Time & Location
5. Ensure that your lights are connected to any NDB sub-controllers
6. Navigate to the 'Stage' page from the menu to configure lighting output
7. **Configuring Lighting Output**
   - **a.** Click to open the output sidebar
   - **b.** Add NDB sub-controllers via the '+'
   - **c.** Test connection with 'Identify' trigger
   - **d.** Select discovered NDB sub-controllers
   - **e.** Set number of lights per port and any smart Ts
   - **f.** Navigate to 'Layout' tab to modify pixel mapping if required
   - **g.** Tap 'Select' to choose multiple ports and edit them together

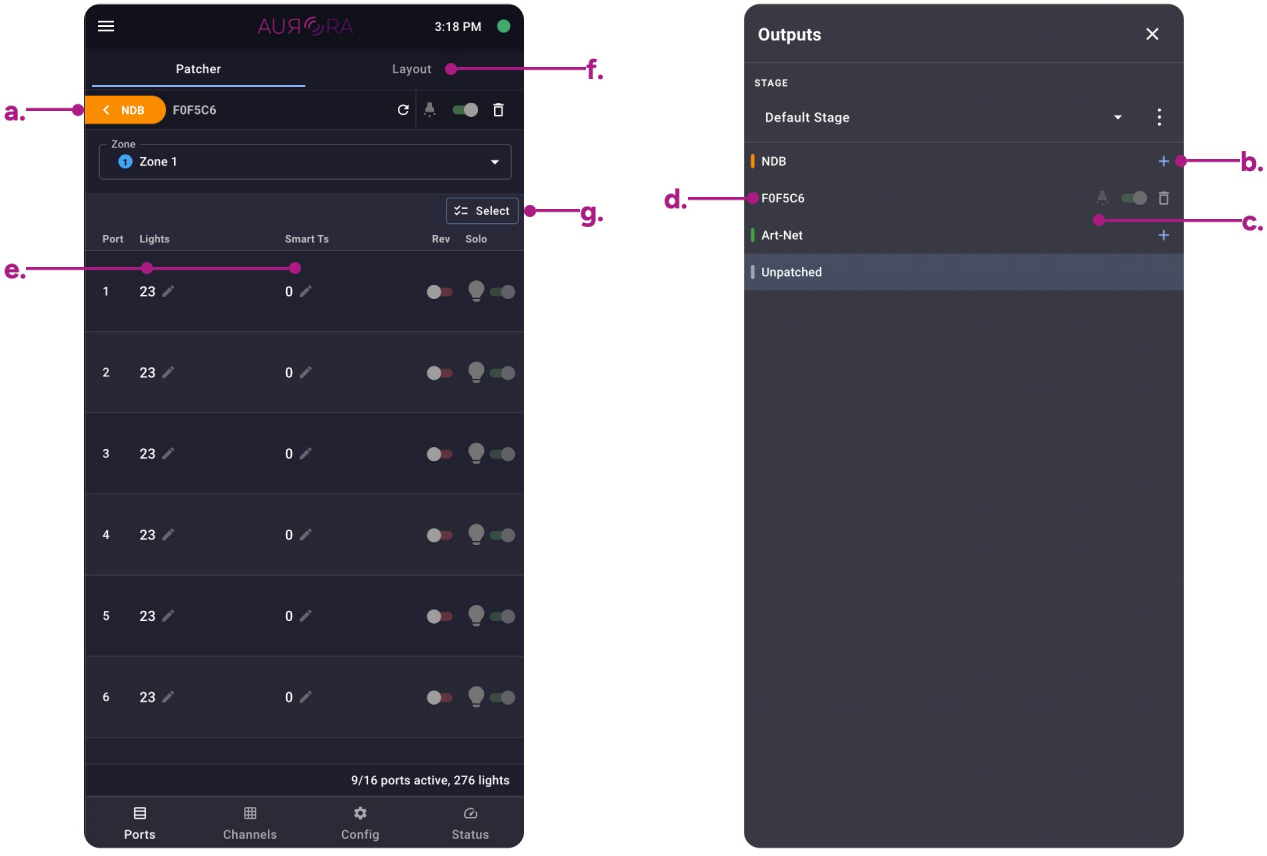

TURN OVER

8. Navigate to the ‘Show’ page from the menu

9. **Using Live Mode**

   a. Navigate to the ‘Live’ tab on the ‘Show’ page

   b. Set global brightness and audio-reactivity at the top of the page (also shown on the ‘Show’ tab)

   c. Use the zone button to access the live settings of other zones

   d. Change pattern, palette, and parameters to modify lighting effects

10. **Using Show Mode**

   e. Navigate to the ‘Show’ tab

   f. Press the play icon to begin playback at a specific cue

   g. Press the 3-dot menu to edit, duplicate or delete a cue

   h. ‘+ Add Cue’ to make a new cue

   i. Use transport controls to control show playback

   j. Tap ‘Select’ to bulk select cues and drag them to reorder show cues

